

Operation Instructions of Controller

I. Specifications:

- Working temperature: -20-60 °C
- Supply voltage: DC12V
- Product size: L74×W50×H28mm
- Package size: L160×W95×H51mm
- Net weight:170g
- Gross weight:195g
- Output: Three CMOS drain- open output
- Connecting Mode: Common anode
- Rated load current: 4 A each color
- Max load current: 6 A each color

II. Control Method:


Adopt button control method, function of each button as below:

Mode: is the style/color function key, could choose different color changes, 6 changes in total.

Style changing table as below:

No.	Style	Remarks
1	Three color jumpy change	
2	Flow change	
3	glitter	
4	Gradual change	
5	Keep light	
6	circle	1~5

III. Panel specification and connecting drawing as follows:

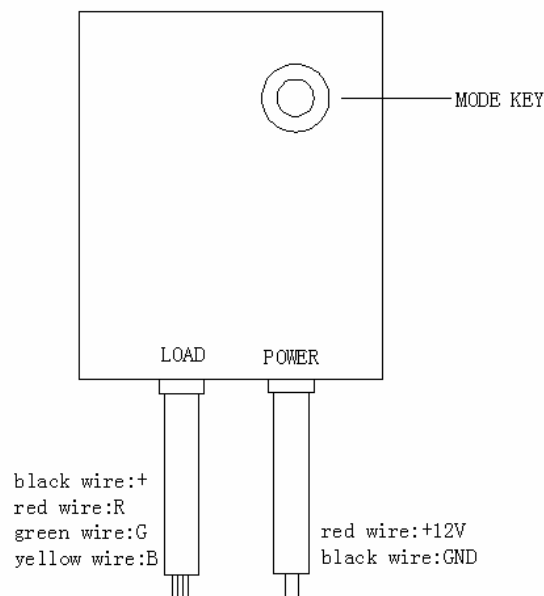

IV. Photo of Object:



V. Warning:

1. Supply voltage of this product is DC12V; never connect to DC24V or AC220V.
 2. Never connect two wires directly in case of short circuit.
 3. Lead wire should be connected correctly according to colors that connecting diagram offers.
 4. Warranty of this product is one year, in this period we guarantee replacement or repairing with no charge, but exclude the artificial situation of damaged or overload working.
-