
Operation Instructions of Controller

I. Specifications:

Working temperature: -20-60 °C
Supply voltage: DC12V
Product size: L95×W65×H25 mm
Package size: L160×W95×H51mm
Net weight:250g
Gross weight:280g
Output: Three CMOS drain- open output
Connecting Mode: Common anode
Rated load current: 4 A each color
Max load current: 6 A each color

II. Control Method:

Adopt wireless control method, function of each button as below:

Button “A” : is the style/color function key, could choose different color changes

Button “B”: each press changing speed +1, 100 levels in total;


Button “C”: each press changing speed -1

Button “D”: The output switch.

Style changing table as below:

Item	Patterns	remarks
1	Static red	
2	Static Blue	
3	Static Pink	
4	Static Green	
5	Static Yellow	
6	Static cyan	
7	Static white	
8	Jumpy changing	Button B and C is valid
9	Gradual changing	Button B and C is valid

III. Panel specification and connecting drawing as follows:

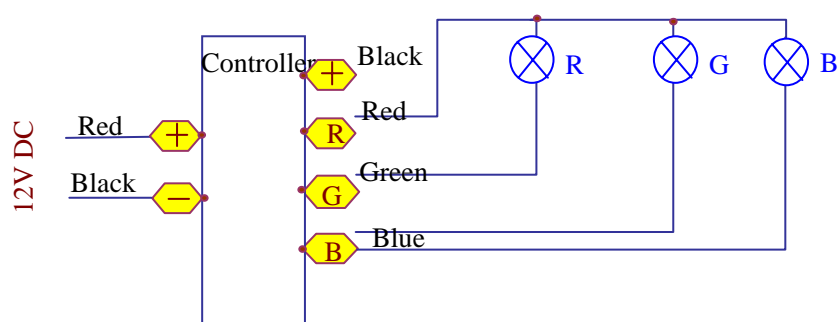

IV. Photo of Object:



V. Warning:

1. Supply voltage of this product is DC12V; never connect to DC24V or AC220V.
2. Never connect two wires directly in case of short circuit.
3. Lead wire should be connected correctly according to colors that connecting diagram offers.
4. Warranty of this product is one year, in this period we guarantee replacement or repairing with no charge, but exclude the artificial situation of damaged or overload working.