



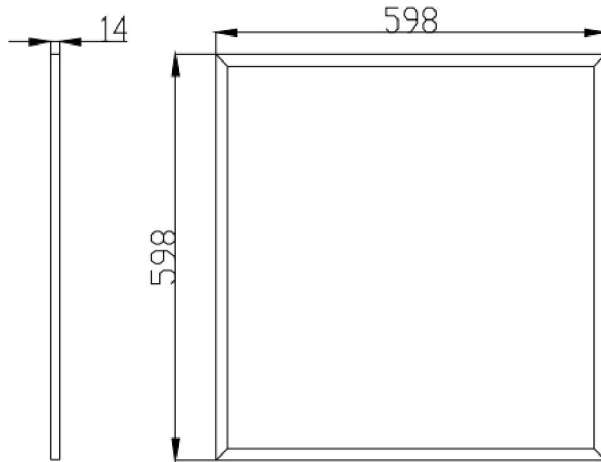

## Specifications

**Product:** 40W 600×600mm panel light

**Item No.:** LZ-PL-M3030-AC100-240V-SMD

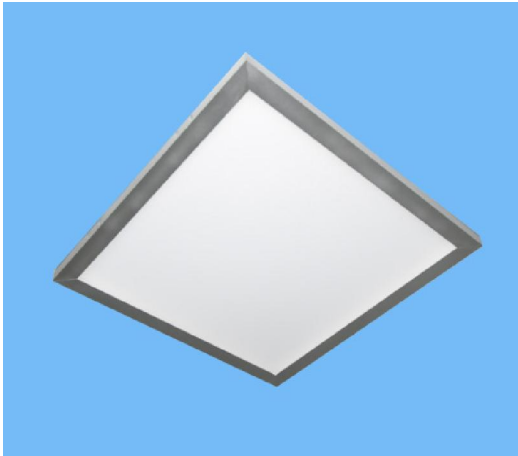

Installation Size 600× 600mm

1. Use imported brand LEDs, no UV, IR or other radiation, no hazardous metal;
2. No pollution to human body or environment.
3. Raw materials used are strictly complied with ROHS;
4. Energy saving, long life, excellent color rendering;
5. International standard base, easy to mount, replacement for traditional lights;
6. Widely used in indoor lighting of household, market, showcase, stage, museum etc.

**Working temperature :** -20 - +45

**Storage temperature :** -30 - +50

**Ingress protection :** IP20

**Working life :** 35,000Hrs

### Technical parameters:

Item	Instruction		Min	Type	Max	Unit
voltage input	AC power, watt meter		100	220	240	V/AC
current input	AC power, watt meter		290	300	310	mA
Total power consumption	power summation of LEDs		39	40	41	W
luminous flux	WW	OSA & Integrating Sphere	2100	2200	2300	Lm
	CW	OSA & Integrating Sphere	1710	1720	1730	
color temperature	WW	OSA & Integrating Sphere	3000	3105	3500	K
	CW	OSA & Integrating Sphere	6000	6018	7000	
Light emitting efficiency	WW	OSA & Integrating Sphere	56	58	60	Lm/W
	CW	OSA & Integrating Sphere	48	50	52	
illuminance	WW	AC power, light-meter, at 1 meter	410	420	430	Lux
	CW	AC power, light-meter, at 1 meter	580	590	600	
CRI	WW	OSA & Integrating Sphere	—	63	—	Ra
	CW	OSA & Integrating Sphere	—	73	—	
beam angle			—	120	—	Deg
replacement for incandescent light			—	80	—	W